Chapter 6
More Conditionals and Loops

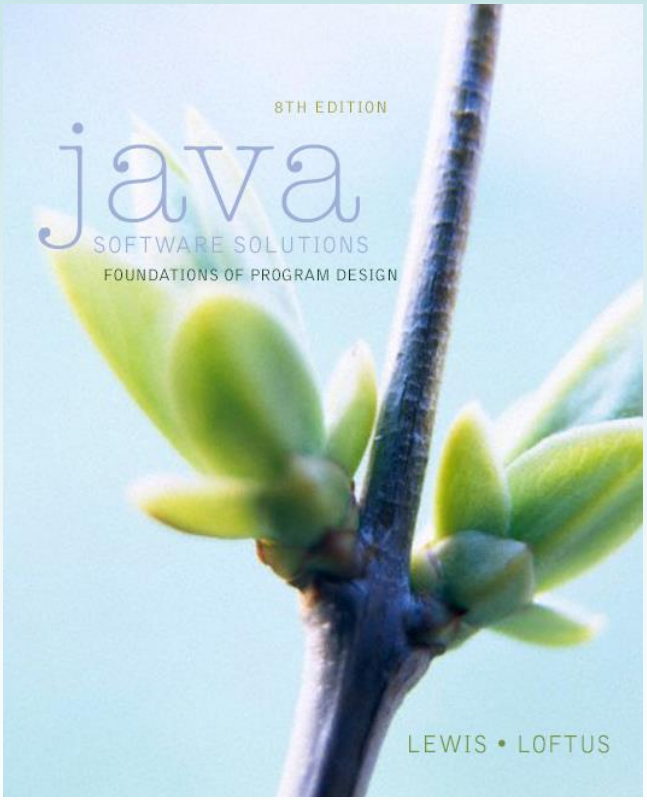

Java Software Solutions

Foundations of Program Design

8th Edition

John Lewis
William Loftus

Addison-Wesley
is an imprint of
PEARSON

Copyright © 2014 Pearson Education, Inc.

More Conditionals and Loops

- Now we can fill in some additional details regarding Java conditional and repetition statements
- Chapter 6 focuses on:
  - the switch statement
  - the conditional operator
  - the do loop
  - the for loop
  - drawing with the aid of conditionals and loops
  - dialog boxes

Copyright © 2014 Pearson Education, Inc.

Outline



The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement

Drawing with Loops and Conditionals

Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- The *switch statement* provides another way to decide which statement to execute next
- The `switch` statement evaluates an expression, then attempts to match the result to one of several possible *cases*
- Each case contains a value and a list of statements
- The flow of control transfers to statement associated with the first case value that matches

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- The general syntax of a `switch` statement is:

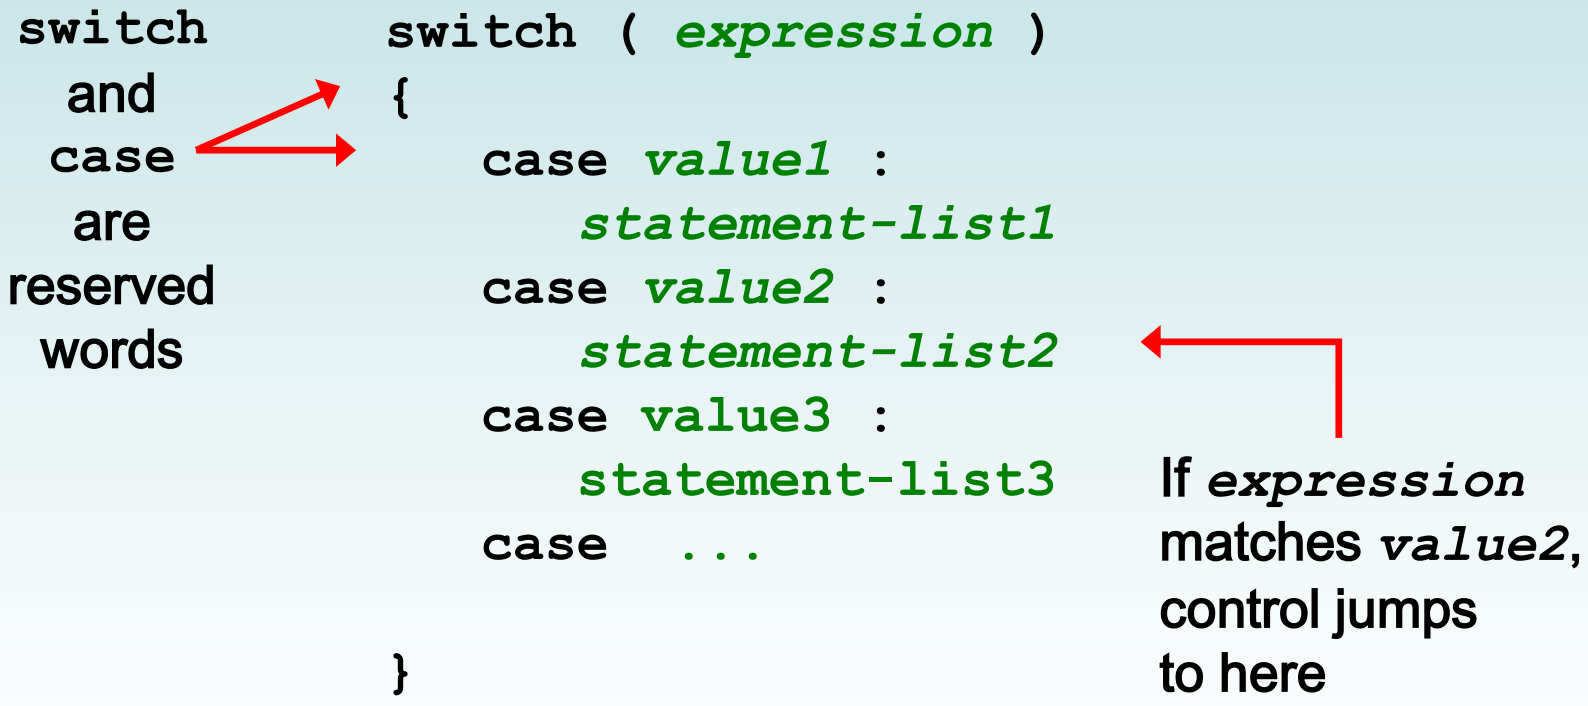

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- Often a *break statement* is used as the last statement in each case's statement list
- A `break` statement causes control to transfer to the end of the `switch` statement
- If a `break` statement is not used, the flow of control will continue into the next case
- Sometimes this may be appropriate, but often we want to execute only the statements associated with one case

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- An example of a switch statement:

```
switch (option)
{
   case 'A':
      aCount++;
      break;
   case 'B':
      bCount++;
      break;
   case 'C':
      cCount++;
      break;
}
```

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- A `switch` statement can have an optional *default case*
- The default case has no associated value and simply uses the reserved word `default`
- If the default case is present, control will transfer to it if no other case value matches
- If there is no default case, and no other value matches, control falls through to the statement after the switch

Copyright © 2014 Pearson Education, Inc.

The switch Statement

- The type of a switch expression must be integers, characters, or enumerated types
- As of Java 7, a switch can also be used with strings
- You cannot use a switch with floating point values
- The implicit boolean condition in a `switch` statement is equality
- You cannot perform relational checks with a `switch` statement
- See `GradeReport.java`

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  GradeReport.java       Author: Lewis/Loftus
//
//  Demonstrates the use of a switch statement.
//********************************************************************

import java.util.Scanner;

public class GradeReport
{
   //-----------------------------------------------------------------
   //  Reads a grade from the user and prints comments accordingly.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      int grade, category;

      Scanner scan = new Scanner(System.in);

      System.out.print("Enter a numeric grade (0 to 100): ");
      grade = scan.nextInt();

      category = grade / 10;

      System.out.print("That grade is ");
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
        switch (category)
        {
            case 10:
                System.out.println("a perfect score. Well done.");
                break;
            case 9:
                System.out.println("well above average. Excellent.");
                break;
            case 8:
                System.out.println("above average. Nice job.");
                break;
            case 7:
                System.out.println("average.");
                break;
            case 6:
                System.out.println("below average. You should see the");
                System.out.println("instructor to clarify the material "
                                   + "presented in class.");
                break;
            default:
                System.out.println("not passing.");
        }
    }
}
```

Copyright © 2014 Pearson Education, Inc.

continue

Sample Run

```
Enter a numeric grade (0 to 100): 91
That grade is well above average. Excellent.
```

```
        swi
        {
                System.out.println ("a perfect score. Well done.");
                break;
            case 9:
                System.out.println ("well above average. Excellent.");
                break;
            case 8:
                System.out.println ("above average. Nice job.");
                break;
            case 7:
                System.out.println ("average.");
                break;
            case 6:
                System.out.println ("below average. You should see the");
                System.out.println ("instructor to clarify the material "
                                    + "presented in class.");
                break;
            default:
                System.out.println ("not passing.");
        }
    }
}
```

Copyright © 2014 Pearson Education, Inc.

Outline



The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement

Drawing with Loops and Conditionals

Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

The Conditional Operator

- The *conditional operator* evaluates to one of two expressions based on a boolean condition
- Its syntax is:

```
condition ? expression1 : expression2
```

- If the ***condition*** is true, ***expression1*** is evaluated; if it is false, ***expression2*** is evaluated
- The value of the entire conditional operator is the value of the selected expression

Copyright © 2014 Pearson Education, Inc.

The Conditional Operator

- The conditional operator is similar to an `if-else` statement, except that it is an expression that returns a value
- For example:

```
larger = ((num1 > num2) ? num1 : num2);
```

- If `num1` is greater than `num2`, then `num1` is assigned to `larger`; otherwise, `num2` is assigned to `larger`
- The conditional operator is *ternary* because it requires three operands

Copyright © 2014 Pearson Education, Inc.

The Conditional Operator

- Another example:

```
System.out.println("Your change is " + count +
   ((count == 1) ? "Dime" : "Dimes"));
```

- If `count` equals 1, the "Dime" is printed
- If `count` is anything other than 1, then "Dimes" is printed

Copyright © 2014 Pearson Education, Inc.

Quick Check

Express the following logic in a succinct manner using the conditional operator.

```
if (val <= 10)
   System.out.println("It is not greater than 10.");
else
   System.out.println("It is greater than 10.");
```

Copyright © 2014 Pearson Education, Inc.

Quick Check

Express the following logic in a succinct manner using the conditional operator.

```
if (val <= 10)
   System.out.println("It is not greater than 10.");
else
   System.out.println("It is greater than 10.");
```

```
System.out.println("It is" +
   ((val <= 10) ? " not" : "") +
   " greater than 10.");
```

Copyright © 2014 Pearson Education, Inc.

Outline



The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement

Drawing with Loops and Conditionals

Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

The do Statement

- A *do statement* has the following syntax:

```
do
{
    statement-list;
}
while (condition);
```

- The **statement-list** is executed once initially, and then the **condition** is evaluated
- The statement is executed repeatedly until the condition becomes false

Copyright © 2014 Pearson Education, Inc.

Logic of a do Loop

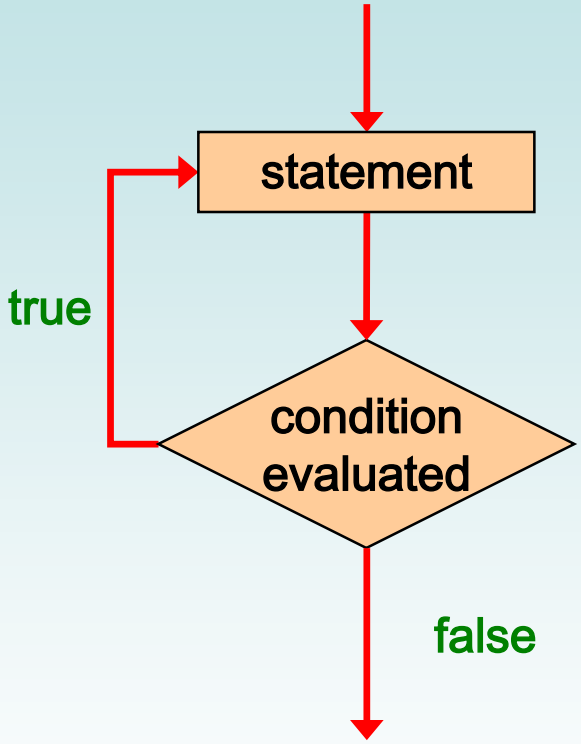

Copyright © 2014 Pearson Education, Inc.

The do Statement

- An example of a `do` loop:

```
int count = 0;
do
{
   count++;
   System.out.println(count);
} while (count < 5);
```

- The body of a `do` loop executes at least once
- See `ReverseNumber.java`

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  ReverseNumber.java       Author: Lewis/Loftus
//
//  Demonstrates the use of a do loop.
//********************************************************************

import java.util.Scanner;

public class ReverseNumber
{
   //-----------------------------------------------------------------
   //  Reverses the digits of an integer mathematically.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      int number, lastDigit, reverse = 0;

      Scanner scan = new Scanner(System.in);
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
        System.out.print("Enter a positive integer: ");
        number = scan.nextInt();

        do
        {
           lastDigit = number % 10;
           reverse = (reverse * 10) + lastDigit;
           number = number / 10;
        }
        while (number > 0);

        System.out.println("That number reversed is " + reverse);
    }
}
```

Copyright © 2014 Pearson Education, Inc.

continue

```
        System.out.
        number = sc

        do
        {
            lastDigit = number % 10;
            reverse = (reverse * 10) + lastDigit;
            number = number / 10;
        }
        while (number > 0);

        System.out.println("That number reversed is " + reverse);
    }
}
```

Sample Run

```
Enter a positive integer: 2896
That number reversed is 6982
```

Copyright © 2014 Pearson Education, Inc.

Comparing while and do

The while Loop

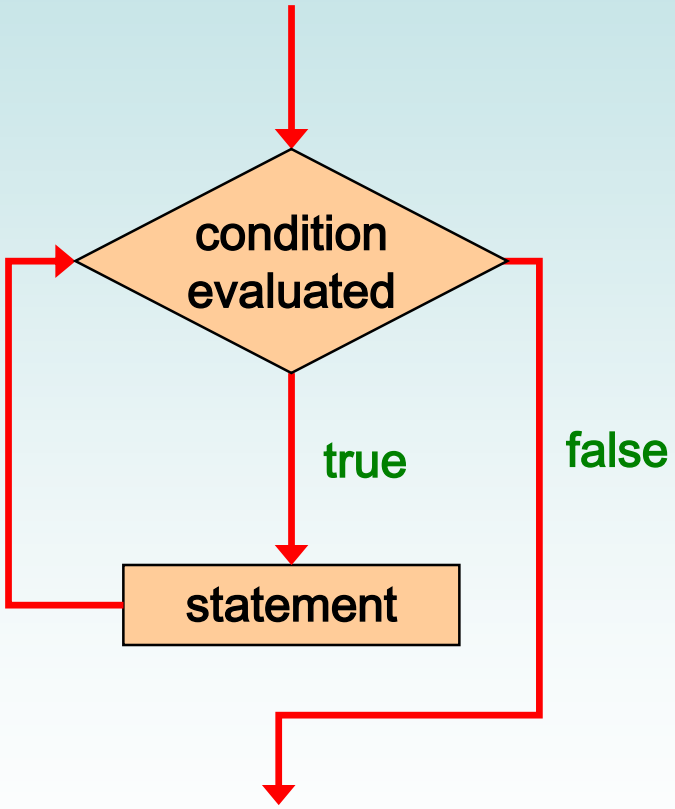

The do Loop

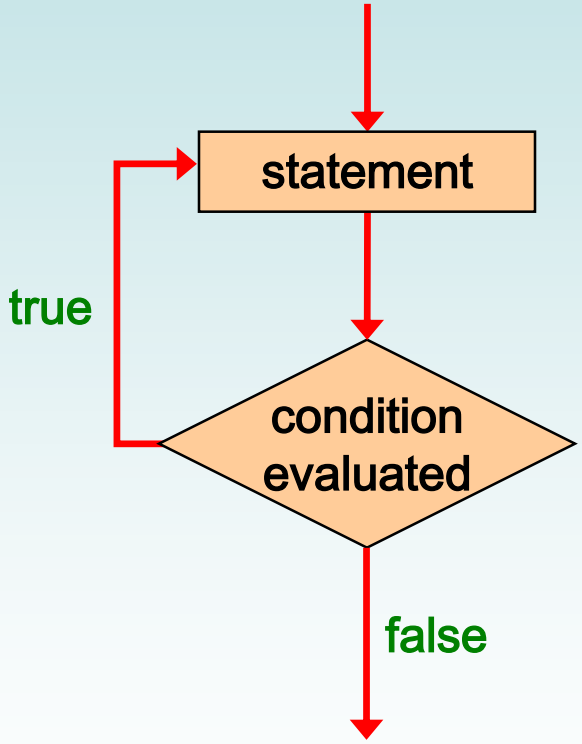

Copyright © 2014 Pearson Education, Inc.

Outline



The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement

Drawing with Loops and Conditionals

Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

The for Statement

- A *for statement* has the following syntax:

The *initialization* is executed once before the loop begins

The *statement* is executed until the *condition* becomes false

```
for ( initialization ; condition ; increment )
   statement;
```

The *increment* portion is executed at the end of each iteration

Copyright © 2014 Pearson Education, Inc.

Logic of a for loop

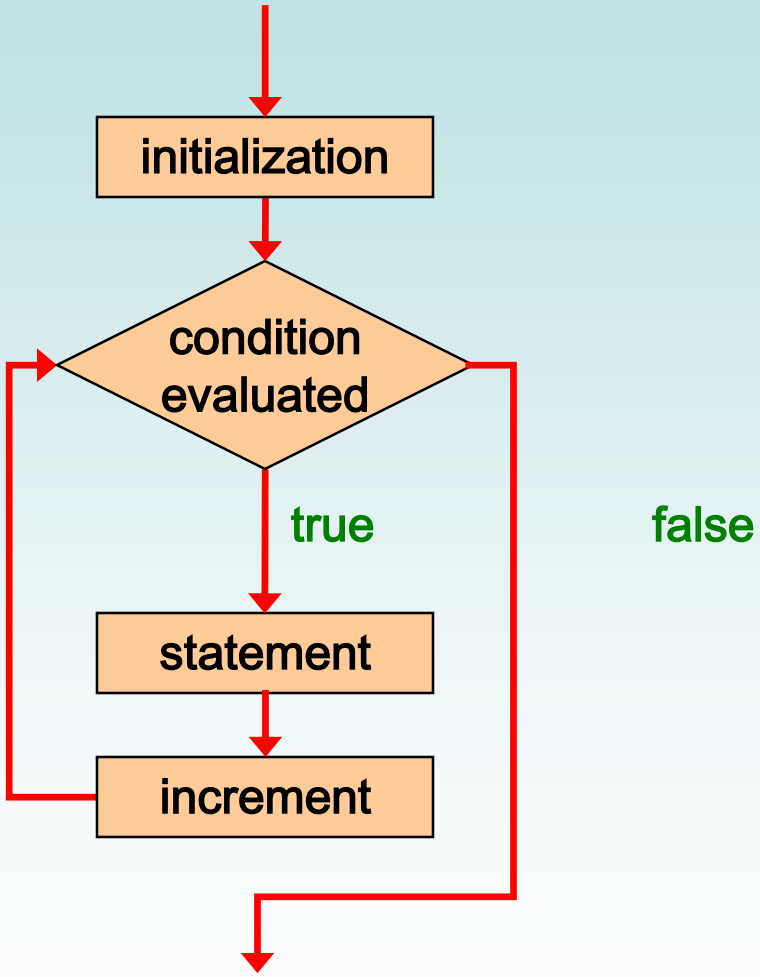

Copyright © 2014 Pearson Education, Inc.

The for Statement

- A `for` loop is functionally equivalent to the following `while` loop structure:

```
initialization;
while ( condition )
{
   statement;
   increment;
}
```

Copyright © 2014 Pearson Education, Inc.

The for Statement

- An example of a `for` loop:

```
for (int count=1; count <= 5; count++)
   System.out.println(count);
```

- The initialization section can be used to declare a variable
- Like a `while` loop, the condition of a `for` loop is tested prior to executing the loop body
- Therefore, the body of a `for` loop will execute zero or more times

Copyright © 2014 Pearson Education, Inc.

The for Statement

- The increment section can perform any calculation:

```
for (int num=100; num > 0; num -= 5)
   System.out.println(num);
```

- A `for` loop is well suited for executing statements a specific number of times that can be calculated or determined in advance
- See `Multiples.java`
- See `Stars.java`

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  Multiples.java       Author: Lewis/Loftus
//
//  Demonstrates the use of a for loop.
//********************************************************************

import java.util.Scanner;

public class Multiples
{
   //-----------------------------------------------------------------
   //  Prints multiples of a user-specified number up to a user-
   //  specified limit.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      final int PER_LINE = 5;
      int value, limit, mult, count = 0;

      Scanner scan = new Scanner(System.in);

      System.out.print("Enter a positive value: ");
      value = scan.nextInt();
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
      System.out.print("Enter an upper limit: ");
      limit = scan.nextInt();

      System.out.println();
      System.out.println("The multiples of " + value + " between " +
                         value + " and " + limit + " (inclusive) are:");

      for (mult = value; mult <= limit; mult += value)
      {
         System.out.print(mult + "\t");

         // Print a specific number of values per line of output
         count++;
         if (count % PER_LINE == 0)
            System.out.println();
      }
   }
}
```

Copyright © 2014 Pearson Education, Inc.

Sample Run

```
Enter a positive value: 7
Enter an upper limit: 400

The multiples of 7 between 7 and 400 (inclusive) are:
7       14      21      28      35
42      49      56      63      70
77      84      91      98      105
112     119     126     133     140
147     154     161     168     175
182     189     196     203     210
217     224     231     238     245
252     259     266     273     280
287     294     301     308     315
322     329     336     343     350
357     364     371     378     385
392     399
```

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  Stars.java       Author: Lewis/Loftus
//
//  Demonstrates the use of nested for loops.
//********************************************************************

public class Stars
{
   //-----------------------------------------------------------------
   //  Prints a triangle shape using asterisk (star) characters.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      final int MAX_ROWS = 10;

      for (int row = 1; row <= MAX_ROWS; row++)
      {
         for (int star = 1; star <= row; star++)
            System.out.print("*");

         System.out.println();
      }
   }
}
```

Copyright © 2014 Pearson Education, Inc.

```
//********************                    ******************************
//  Stars.java       Auth                  s
//
//  Demonstrates the use                   oops.
//********************                    ******************************

public class Stars
{
   //-----------------                     -----------------------------
   //  Prints a triangle                   erisk (star) characters.
   //-----------------                     -----------------------------
   public static void mai                 s)
   {
      final int MAX_ROWS

      for (int row = 1; row <= MAX_ROWS; row++)
      {
         for (int star = 1; star <= row; star++)
            System.out.print("*");

         System.out.println();
      }
   }
}
```

Output

```
*
**
***
****
*****
******
*******
********
*********
**********
```

Copyright © 2014 Pearson Education, Inc.

Quick Check

Write a code fragment that rolls a die 100 times and counts the number of times a 3 comes up.

Copyright © 2014 Pearson Education, Inc.

Quick Check

Write a code fragment that rolls a die 100 times and counts the number of times a 3 comes up.

```
Die die = new Die();
int count = 0;
for (int num=1; num <= 100; num++)
   if (die.roll() == 3)
      count++;
Sytem.out.println(count);
```

Copyright © 2014 Pearson Education, Inc.

The for Statement

- Each expression in the header of a `for` loop is optional
- If the initialization is left out, no initialization is performed
- If the condition is left out, it is always considered to be true, and therefore creates an infinite loop
- If the increment is left out, no increment operation is performed

Copyright © 2014 Pearson Education, Inc.

For-each Loops

- A variant of the `for` loop simplifies the repetitive processing of items in an iterator
- For example, suppose `bookList` is an `ArrayList<Book>` object
- The following loop will print each book:

```
for (Book myBook : bookList)
   System.out.println(myBook);
```

- This version of a for loop is often called a *for-each loop*

Copyright © 2014 Pearson Education, Inc.

For-each Loops

- A for-each loop can be used on any object that implements the `Iterable` interface
- It eliminates the need to retrieve an iterator and call the `hasNext` and `next` methods explicitly
- It also will be helpful when processing arrays, which are discussed in Chapter 8

Copyright © 2014 Pearson Education, Inc.

Quick Check

Write a for-each loop that prints all of the `Student` objects in an `ArrayList<Student>` object called `roster`.

Copyright © 2014 Pearson Education, Inc.

Quick Check

Write a for-each loop that prints all of the `Student` objects in an `ArrayList<Student>` object called `roster`.

```
for (Student student : roster)
   System.out.println(student);
```

Copyright © 2014 Pearson Education, Inc.

Outline

The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement



Drawing with Loops and Conditionals

Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

Drawing Techniques

- Conditionals and loops enhance our ability to generate interesting graphics

- See `Bullseye.java`
- See `BullseyePanel.java`

- See `Boxes.java`
- See `BoxesPanel.java`

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  Bullseye.java       Author: Lewis/Loftus
//
//  Demonstrates the use of loops to draw.
//********************************************************************

import javax.swing.JFrame;

public class Bullseye
{
   //-----------------------------------------------------------------
   //  Creates the main frame of the program.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      JFrame frame = new JFrame("Bullseye");
      frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

      BullseyePanel panel = new BullseyePanel();

      frame.getContentPane().add(panel);
      frame.pack();
      frame.setVisible(true);
   }
}
```

Copyright © 2014 Pearson Education, Inc.

```
//*************
//  Bullseye.j
//
//  Demonstrat
//*************

import javax.s

public class B
{
   //---------
   //  Creates
   //---------
   public stat
   {
      JFrame f
      frame.se

      Bullseye

      frame.getContentPane().add(panel);
      frame.pack();
      frame.setVisible(true);
   }
}
```

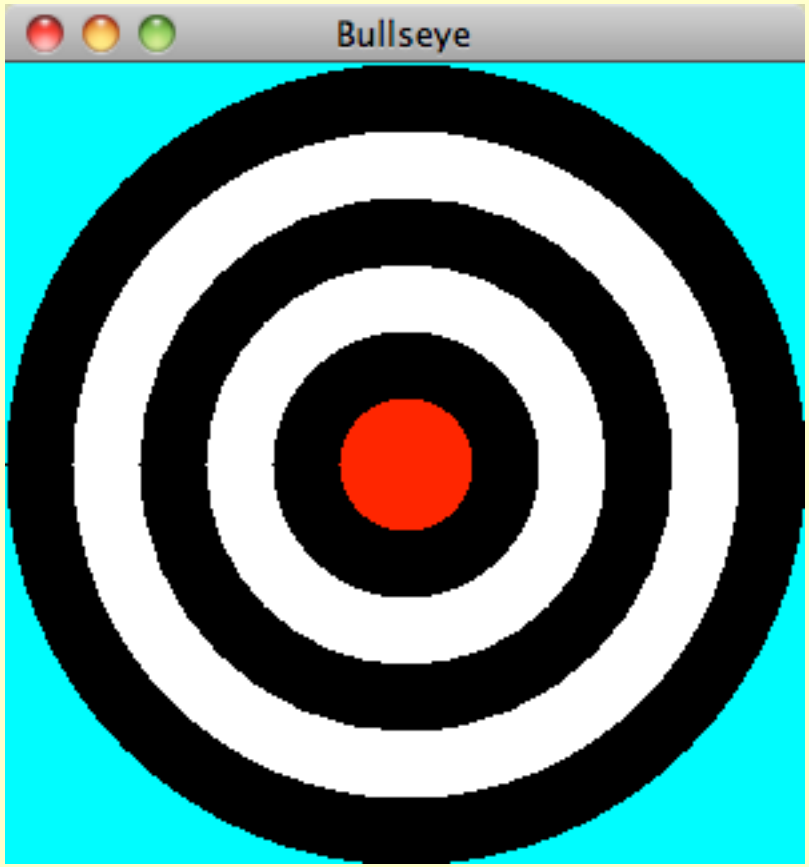

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  BullseyePanel.java       Author: Lewis/Loftus
//
//  Demonstrates the use of conditionals and loops to guide drawing.
//********************************************************************

import javax.swing.JPanel;
import java.awt.*;

public class BullseyePanel extends JPanel
{
   private final int MAX_WIDTH = 300, NUM_RINGS = 5, RING_WIDTH = 25;

   //-----------------------------------------------------------------
   //  Sets up the bullseye panel.
   //-----------------------------------------------------------------
   public BullseyePanel()
   {
      setBackground(Color.cyan);
      setPreferredSize(new Dimension(300,300));
   }
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
    //-----------------------------------------------------------------
    //  Paints a bullseye target.
    //-----------------------------------------------------------------
    public void paintComponent(Graphics page)
    {
        super.paintComponent (page);
        int x = 0, y = 0, diameter = MAX_WIDTH;
        page.setColor(Color.white);

        for (int count = 0; count < NUM_RINGS; count++)
        {
            if (page.getColor() == Color.black)  // alternate colors
                page.setColor(Color.white);
            else
                page.setColor Color.black);

            page.fillOval(x, y, diameter, diameter);

            diameter -= (2 * RING_WIDTH);
            x += RING_WIDTH;
            y += RING_WIDTH;
        }

        // Draw the red bullseye in the center
        page.setColor(Color.red);
        page.fillOval(x, y, diameter, diameter);
    }
}
```

, Inc.

```
//********************************************************************
//  Boxes.java       Author: Lewis/Loftus
//
//  Demonstrates the use of loops to draw.
//********************************************************************

import javax.swing.JFrame;

public class Boxes
{
   //-----------------------------------------------------------------
   //  Creates the main frame of the program.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      JFrame frame = new JFrame("Boxes");
      frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

      BoxesPanel panel = new BoxesPanel();

      frame.getContentPane().add(panel);
      frame.pack();
      frame.setVisible(true);
   }
}
```

Copyright © 2014 Pearson Education, Inc.

```
//*********
//  Boxes.j
//
//  Demonst
//*********

import java

public clas
{
   //------
   //  Crea
   //------
   public s
   {
      JFrar
      frame

      Boxes

      frame.getContentPane().add(panel);
      frame.pack();
      frame.setVisible(true);
   }
}
```

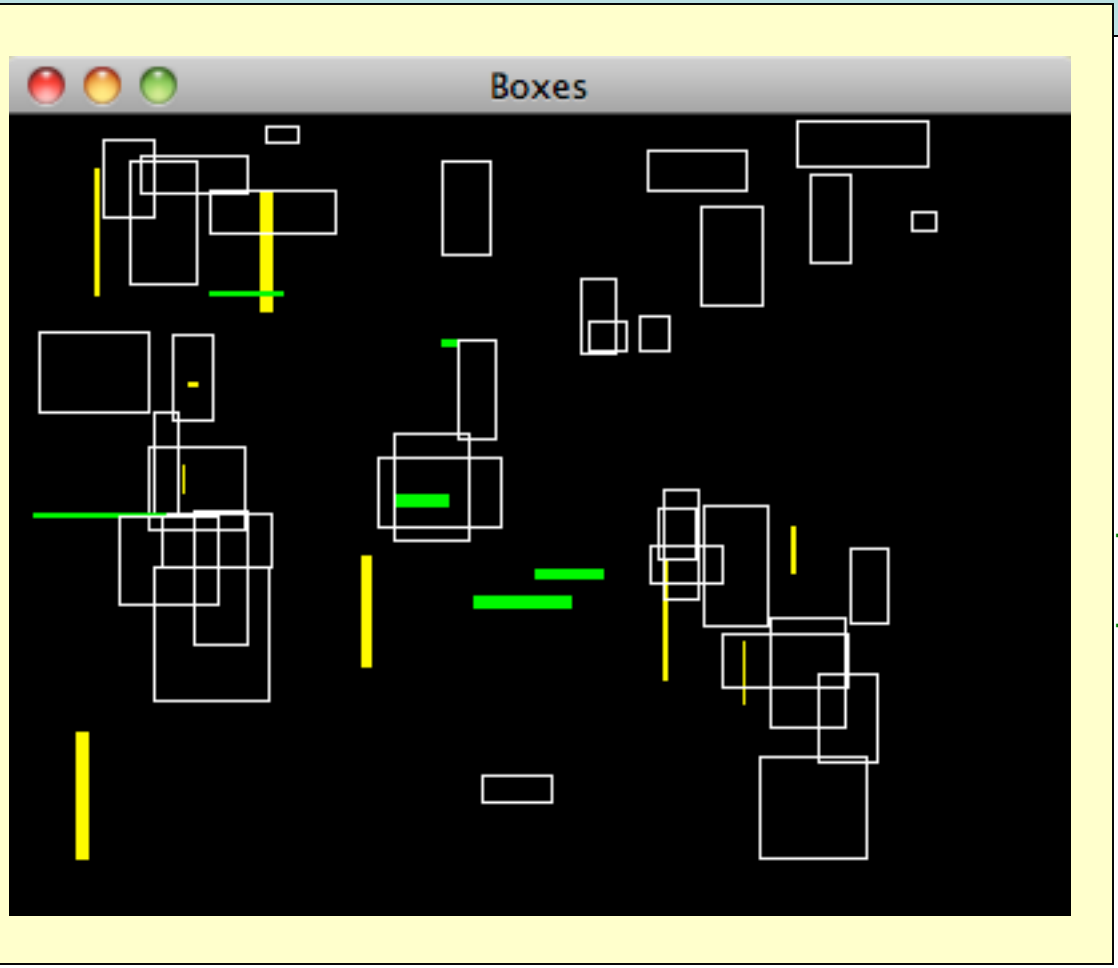

Copyright © 2014 Pearson Education, Inc.

```
//********************************************************************
//  BoxesPanel.java       Author: Lewis/Loftus
//
//  Demonstrates the use of conditionals and loops to guide drawing.
//********************************************************************

import javax.swing.JPanel;
import java.awt.*;
import java.util.Random;

public class BoxesPanel extends JPanel
{
   private final int NUM_BOXES = 50, THICKNESS = 5, MAX_SIDE = 50;
   private final int MAX_X = 350, MAX_Y = 250;
   private Random generator;

   //-----------------------------------------------------------------
   //  Sets up the drawing panel.
   //-----------------------------------------------------------------
   public BoxesPanel()
   {
      generator = new Random();

      setBackground(Color.black);
      setPreferredSize(new Dimension(400, 300));
   }
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
//-----------------------------------------------------------------
//  Paints boxes of random width and height in a random location.
//  Narrow or short boxes are highlighted with a fill color.
//-----------------------------------------------------------------
public void paintComponent(Graphics page)
{
   super.paintComponent(page);

   int x, y, width, height;

   for (int count = 0; count < NUM_BOXES; count++)
   {
      x = generator.nextInt(MAX_X) + 1;
      y = generator.nextInt(MAX_Y) + 1;

      width = generator.nextInt(MAX_SIDE) + 1;
      height = generator.nextInt(MAX_SIDE) + 1;
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
            if (width <= THICKNESS)  // check for narrow box
            {
               page.setColor(Color.yellow);
               page.fillRect(x, y, width, height);
            }
            else
               if (height <= THICKNESS)  // check for short box
               {
                  page.setColor(Color.green);
                  page.fillRect(x, y, width, height);
               }
               else
               {
                  page.setColor(Color.white);
                  page.drawRect(x, y, width, height);
               }
         }
      }
}
```

Copyright © 2014 Pearson Education, Inc.

Outline

The `switch` Statement

The Conditional Operator

The `do` Statement

The `for` Statement

Drawing with Loops and Conditionals



Dialog Boxes

Copyright © 2014 Pearson Education, Inc.

Dialog Boxes

- A *dialog box* is a window that appears on top of any currently active window
- It may be used to:
  - convey information
  - confirm an action
  - allow the user to enter data
  - pick a color
  - choose a file
- A dialog box usually has a specific, solitary purpose, and the user interaction with it is brief

Copyright © 2014 Pearson Education, Inc.

Dialog Boxes

- The `JOptionPane` class provides methods that simplify the creation of some types of dialog boxes
- See `EvenOdd.java`
- Specialized dialog boxes for choosing colors and files are covered in Chapter 9

Copyright © 2014 Pearson Education, Inc.

```
/********************************************************************
//  EvenOdd.java       Author: Lewis/Loftus
//
//  Demonstrates the use of the JOptionPane class.
//********************************************************************

import javax.swing.JOptionPane;

public class EvenOdd
{
   //-----------------------------------------------------------------
   //  Determines if the value input by the user is even or odd.
   //  Uses multiple dialog boxes for user interaction.
   //-----------------------------------------------------------------
   public static void main(String[] args)
   {
      String numStr, result;
      int num, again;
```

continue

Copyright © 2014 Pearson Education, Inc.

continue

```
        do
        {
            numStr = JOptionPane.showInputDialog("Enter an integer: ");
            num = Integer.parseInt(numStr);

            result = "That number is " + ((num%2 == 0) ? "even" : "odd");

            JOptionPane.showMessageDialog(null, result);
            again = JOptionPane.showConfirmDialog(null, "Do Another?");
        }
        while (again == JOptionPane.YES_OPTION);
    }
}
```

Copyright © 2014 Pearson Education, Inc.

continue

```
do
{
    numStr                                              eger: ");
    num =

    result = "That number is " + ((num%2 == 0) ? "even" : "odd");
```

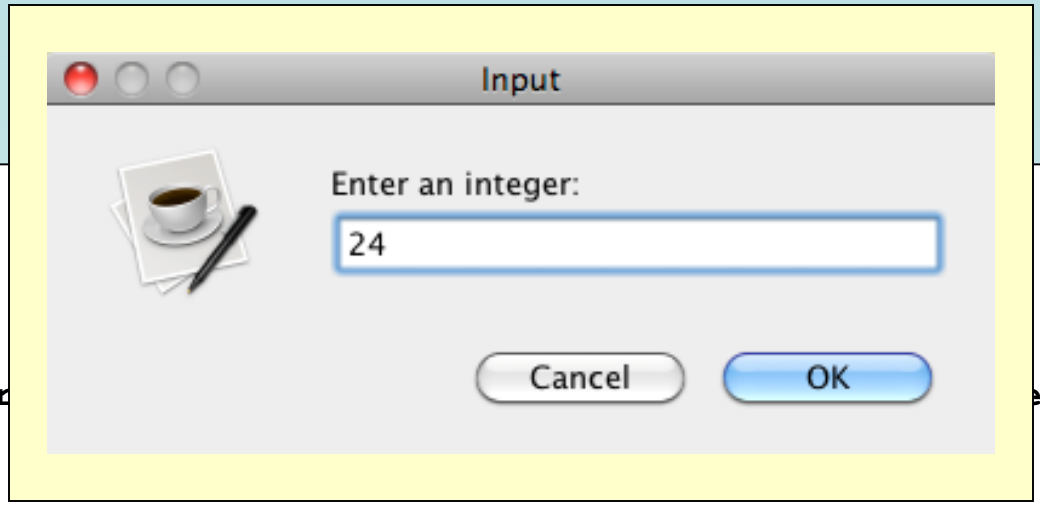

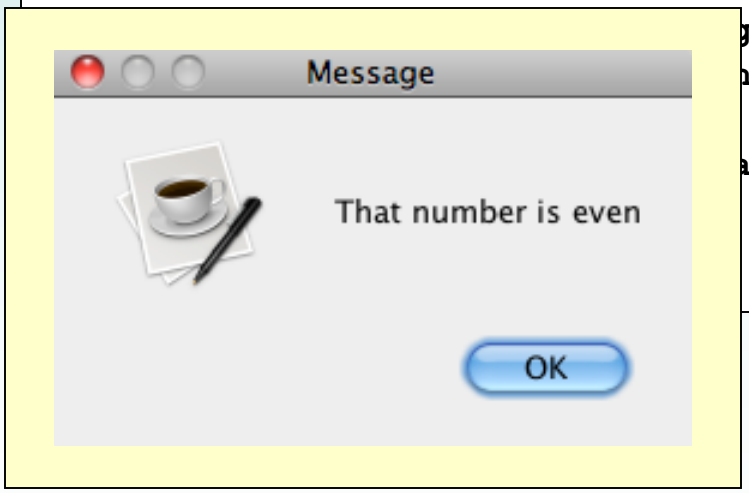

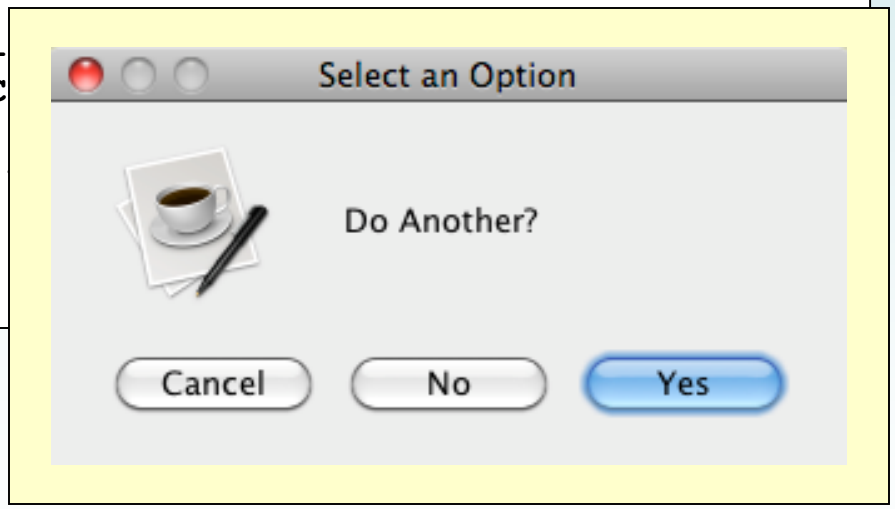

Copyright © 2014 Pearson Education, Inc.

Summary

- Chapter 6 focused on:
  - the switch statement
  - the conditional operator
  - the do loop
  - the for loop
  - drawing with the aid of conditionals and loops
  - dialog boxes

Copyright © 2014 Pearson Education, Inc.